


USB 2.0 Camera Module 5.04 mega pixel 62° auto focus

Output support for RAW RGB, RGB565/555/444, CCIR656,
YUV422/420, YCbCr422 and compression

Relative humidity during operation: max. 20 – 80 %

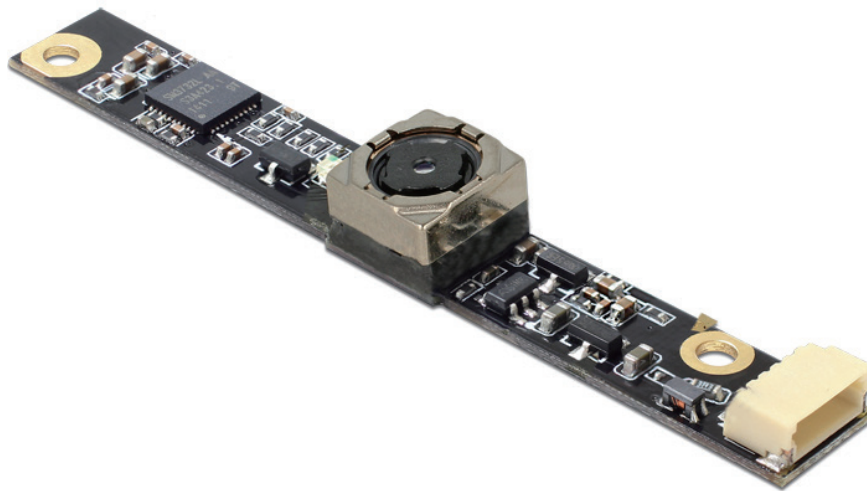


Resolution: 5.04 Mega Pixel
Maximum resolution: QSXGA (2592 x 1944)

Lens: F/2.8

Power consumption:
Sensor suspend: 90 mA
Sensor active: 140 mA ± 5 mA @ 640 x 480 pixel

Frame rates:
30 fps @ HVGA, VGA, XGA, 720p, QVGA
15 fps @ UXGA, 1080p, QXGA



① USB 2.0 5 pin jack SMT, 1 mm pitch

Windows
XP(SP2)/Vista/7/8

MS DirectX
9.0c and above

Linux
2.6.15 and above
with Video4Linux

Min. CPU
P4
1.4 GHz
128 MB RAM

PC with
UVC support

Dimensions
60 x 8 x 5.8 mm

Operating voltage
5 V

Operating temperature
5 °C ~ 40 °C